Supplementary material for

Hematite leach residue as a material for hydrogen plasma smelting reduction: a laboratory-scale study on chemical composition and optical emissions

Henna-Riikka Putaala[1*], Henri Pauna[1], Areej Javed[1], Ubaid Manzoor[2], Dennis Klapproth[2], Ville-Valtteri Visuri[1], Annelies Malfliet[3], Rita Kallio[1], Isnaldi Souza Filho[2,4], Mari Lindgren[5], Dierk Raabe[2], Timo Fabritius[1]

[1*]Process Metallurgy Research Unit, University of Oulu, P.O. Box 4300, Oulu, 90014, Finland.

[2]Max Planck Institute for Sustainable Materials, Max-Planck-Str. 1, 40237, Düsseldorf, Germany.

[3]KU Leuven, Kasteelpark Arenberg 44 - box 2450, Leuven, 3001, Belgium.

[4]Institut Jean Lamour, Université de Lorraine, 2 allée André Guinier, 54011, Nancy, France.

[5]Metso Metals Oy, Kuparitie 10, Pori, 28101, Finland

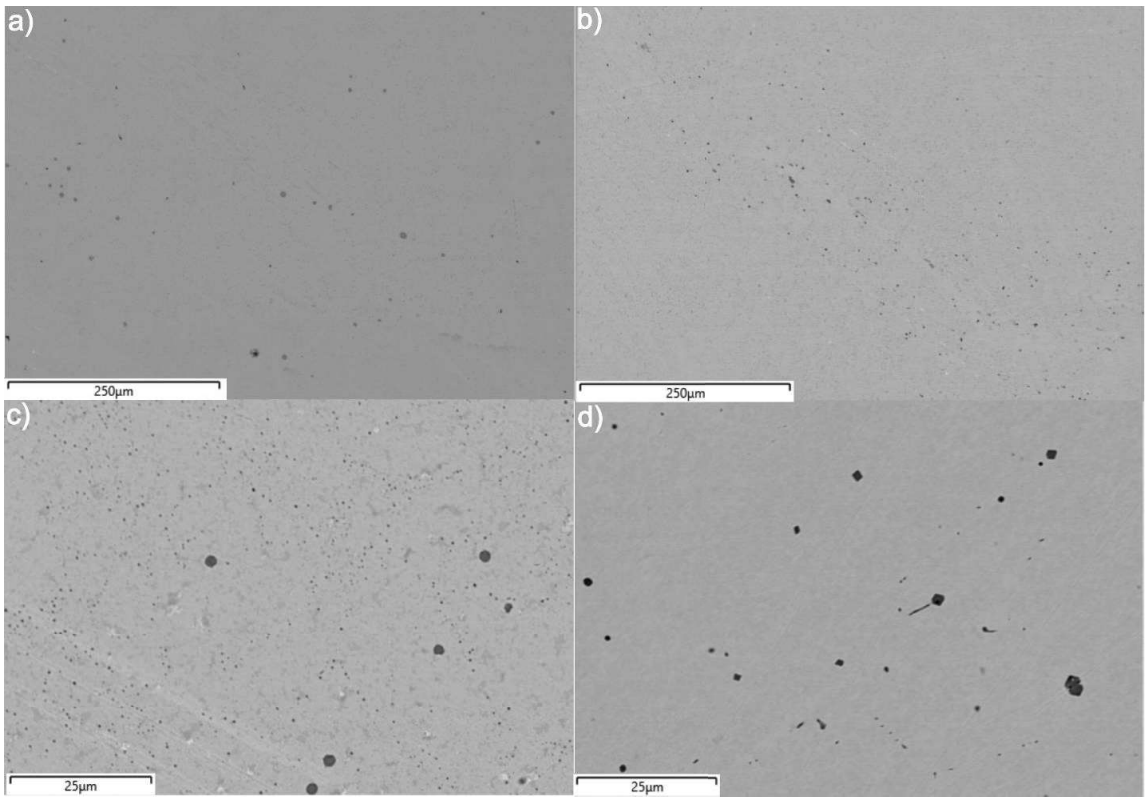

Figure S- 1 FESEM images of the metal parts of the processed samples. a) is from the 7.5-min sample, b) and c) from the 10-min sample and d) from the 12.5-min sample.