

Supplementary file

Controlled fabrication of nanoscale wrinkle structure by fluorocarbon plasma for highly transparent triboelectric nanogenerator

Xiaoliang Cheng, Liming Miao, Zongming Su, Haotian Chen, Yu Song, Xuexian Chen and Haixia Zhang

Microsystems & Nanoengineering (2017) **3**, 16074; doi:10.1038/micronano.2016.74; Published online: 30 January 2017

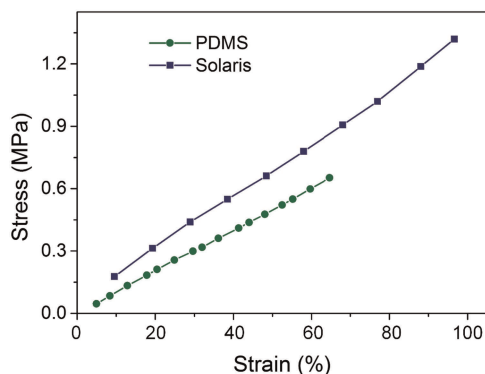


Figure S1 The stress-strain curves for PDMS and Solaris membranes. The Young's moduli of PDMS and Solaris membranes are measured using the stress-strain curves obtained by a pull and push dynamometer. Since the Young's modulus is the ratio of normal stress and normal strain, the moduli for PDMS and Solaris are calculated to be 1.08 and 1.36 Mpa, respectively.