

Wearable textile-based phototherapy platform with customized NIR OLEDs toward non-invasive hair loss treatment

Eun Hae Cho¹, Jinger An¹, Yun Chi² and Kyung Cheol Choi^{1}*

¹School of Electrical Engineering, Korea Advanced Institute of Science and Technology (KAIST), Daejeon 34141, Republic of Korea.



²Department of Materials Science and Engineering, Department of Chemistry and Center of Super-Diamond and Advanced Films (COSDAF), City University of Hong Kong, Kowloon, Hong Kong 999077, Hong Kong SAR

*Corresponding author: kyungcc@kaist.ac.kr (Kyung Cheol Choi)


Table of Contents

Supplementary Figures and Legends


Supplementary Figures. 1 ~ 18

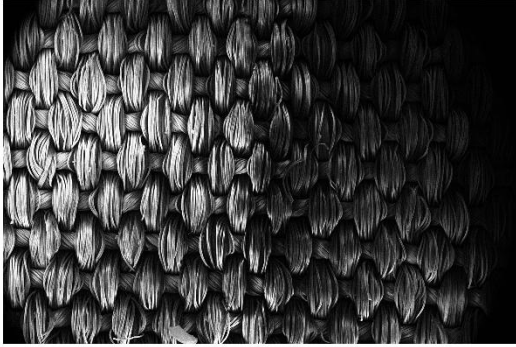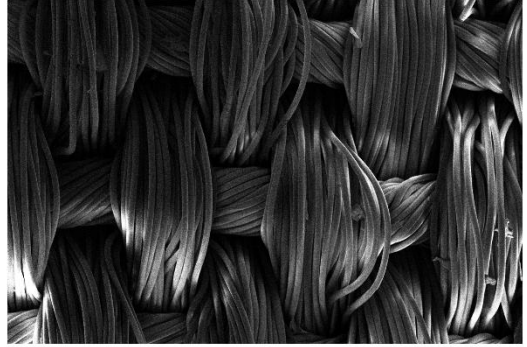a**b**


Supplementary Fig. 1| Morphological analysis of the textile substrate. a, Cross-sectional Cryo-FIB-SEM image of the pure textile substrate. **b,** Magnified image of the fiber bundles within the textile structure, revealing the assembly of multiple filaments.

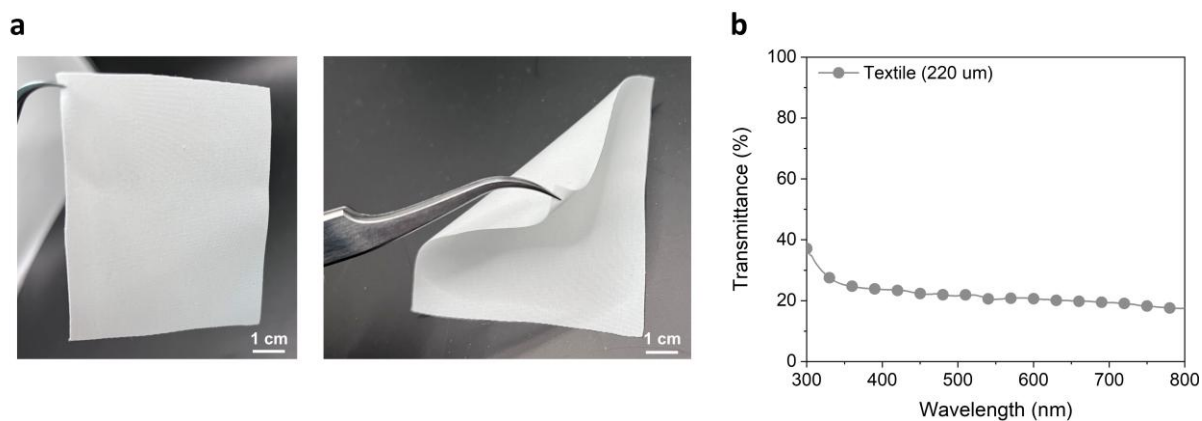


Supplementary Fig. 2| Mechanical flexibility and optical transmittance of the polyester-based textile. a, Demonstration of the mechanical flexibility of the polyester-based textile. **b,** Optical transmittance spectrum of the textile.

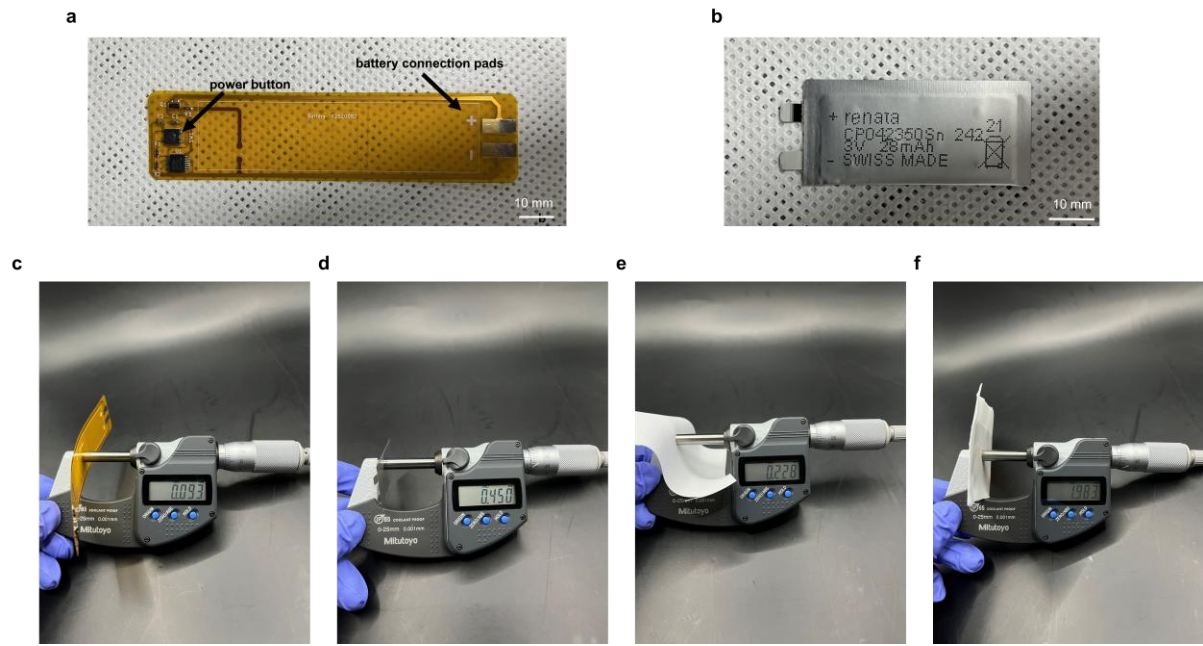


Supplementary Fig. 3| Fully flexible, integrated system. **a**, FPCB incorporating an on/off power button and battery connection pads for portable driving. **b**, Flexible battery used for wireless operation. **c–e**, Thickness of the FPCB, flexible battery, and textile, respectively. **f**, Most thick part of the fully flexible integrated stack (around 2 mm).

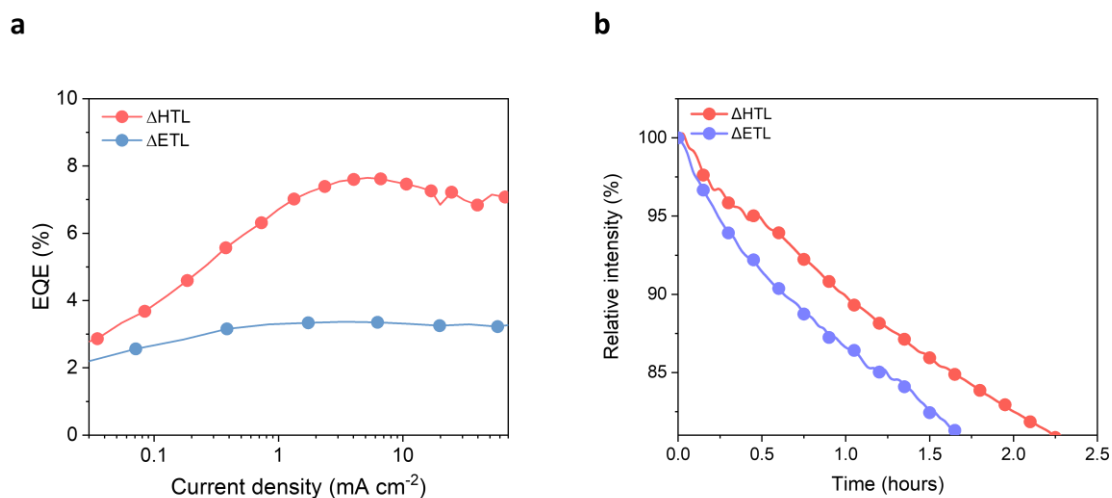


Supplementary Fig. 4| Comparison of HTL-tuned and ETL-tuned microcavity OLEDs at identical cavity length. a, EQE of devices with a constant cavity length, adjusted by varying the HTL or the ETL thickness. **b,** Operational lifetime measured under continuous, constant-current drive at a matched initial radiant intensity.

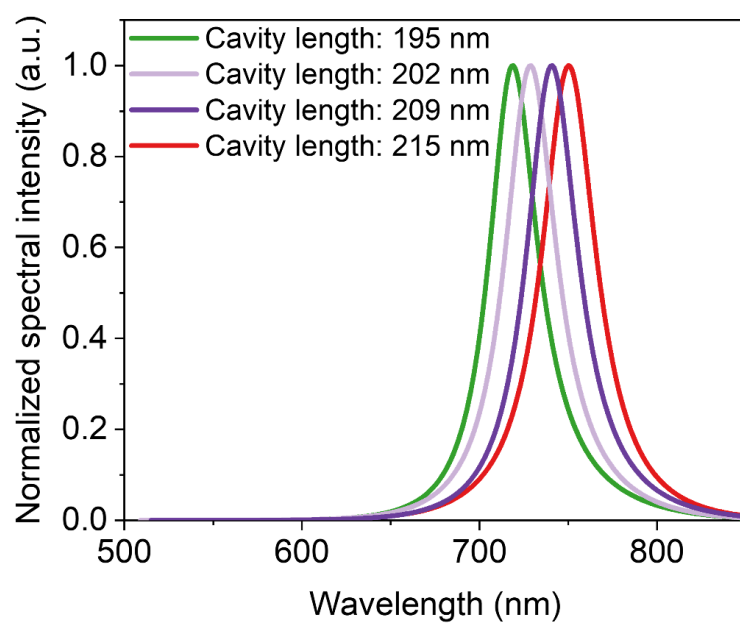


Supplementary Fig. 5| Wavelength tunability of NIR OLEDs based on cavity length modulation. Simulated EL spectra of cavity-structured NIR OLEDs with different cavity lengths, demonstrating wavelength tunability.

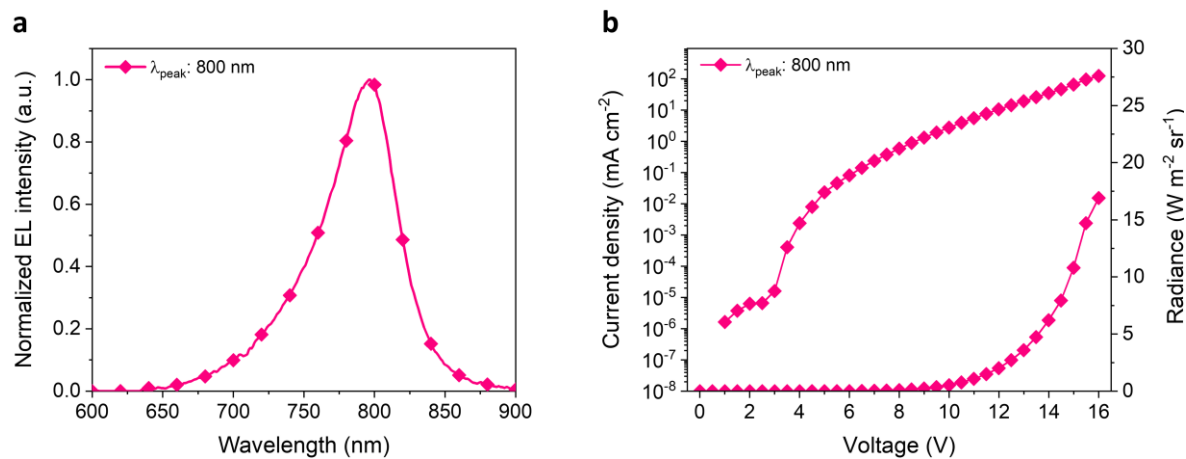


Supplementary Fig. 6| Characteristics of top-emitting NIR OLEDs. a, EL spectrum of a cavity OLED with an emission peak at 800 nm. **b,** J–V–R characteristics of the device.

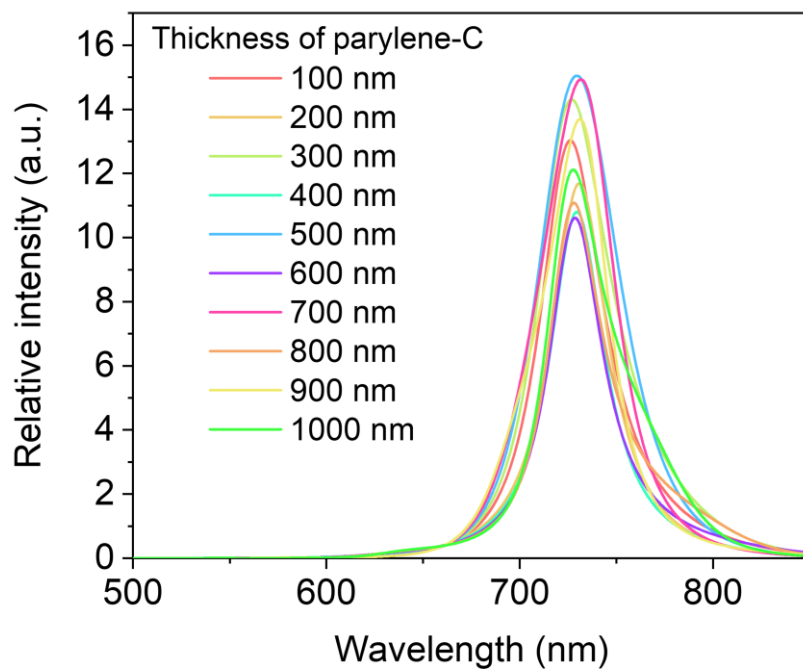


Supplementary Fig. 7| Effect of parylene-C thickness on the forward spectral intensity of top-emitting NIR OLEDs. Simulated spectral intensity in the forward direction as a function of parylene-C layer thickness.

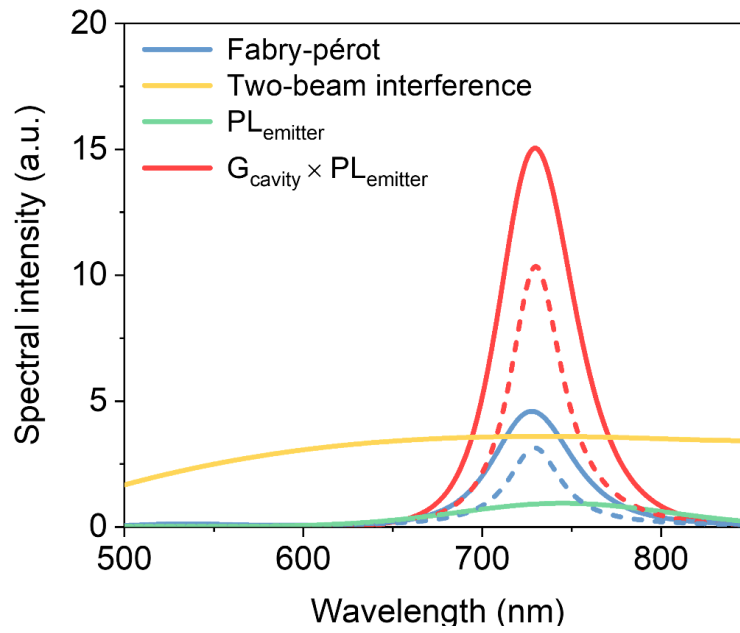



Supplementary Fig. 8| Influence of the capping layer on the microcavity effect. Simulated EL spectra comparing devices with and without a capping layer (solid line: with capping; dashed line: without capping).

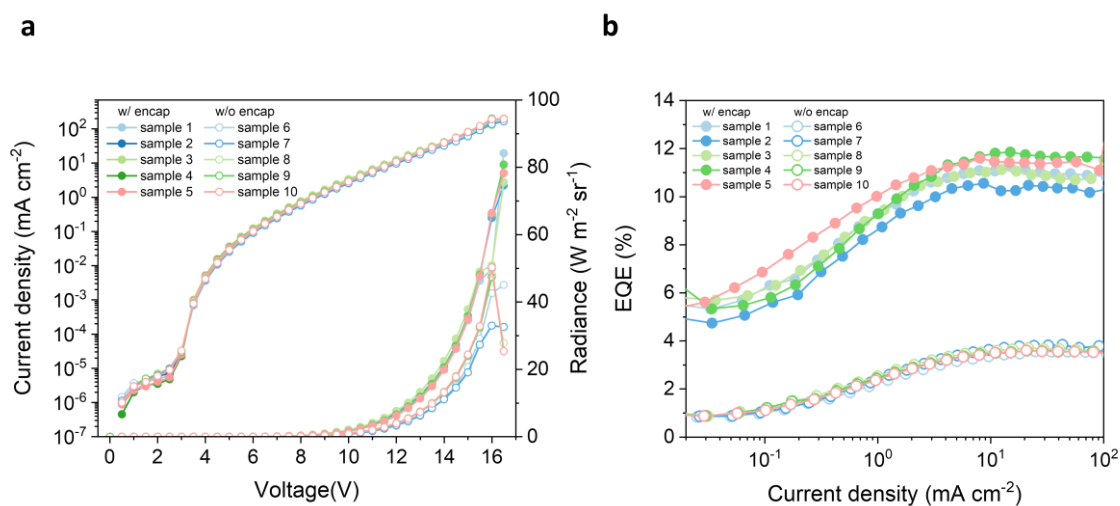


Supplementary Fig. 9| Batch-to-batch performance metrics of the NIR OLEDs. a, Current-density–voltage–radiance characteristics. **b,** External quantum efficiency as a function of current density. All devices ($n = 10$) were measured under identical conditions across batches. (closed symbol: w/ encap, open symbol: w/o encap)

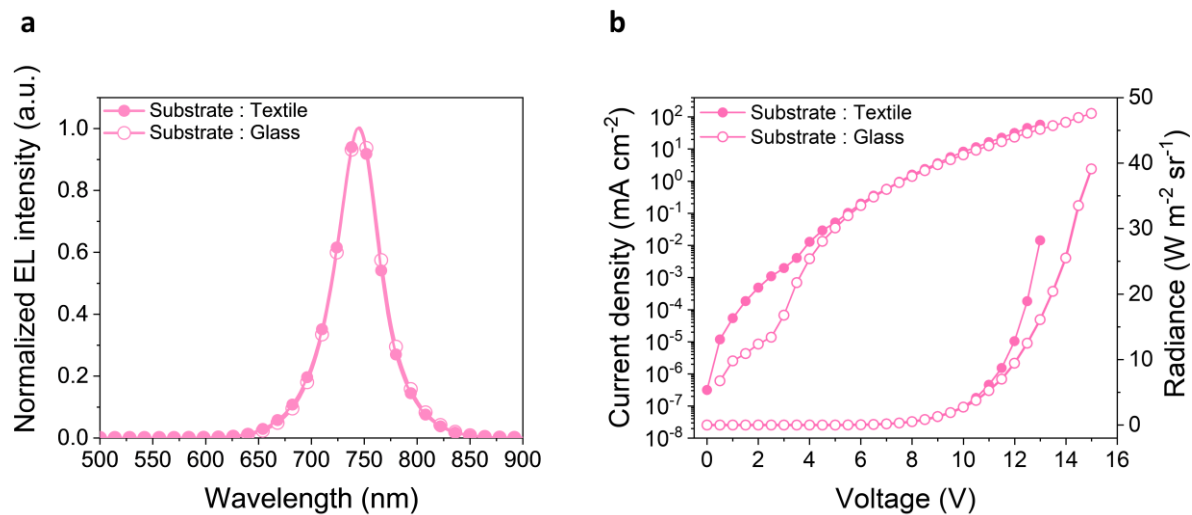


Supplementary Fig. 10| Effect of substrate type on the characteristics of NIR OLEDs. a, EL spectra of devices fabricated on glass and textile substrates (open symbols: glass substrate; closed symbols: textile substrate). **b,** J–V–R characteristics of each device.

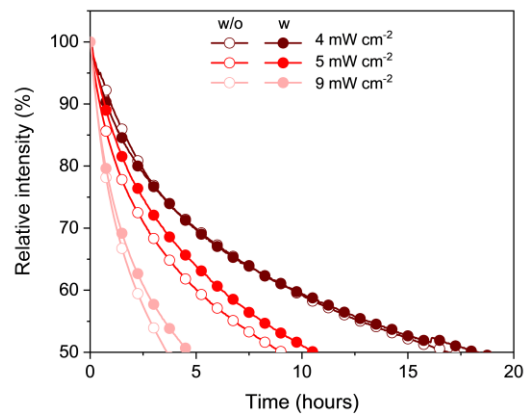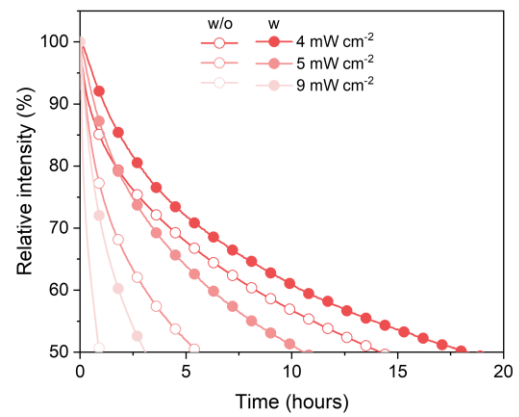a**b**


Supplementary Fig. 11| Long-term operational stability of NIR OLED devices. a, Lifespan of a glass-substrate-based NIR OLED under continuous operation. **b,** Lifespan of a textile-substrate-based NIR OLED, comparing devices without (open symbols) and with (closed symbols) a thermally conductive heat-dissipation layer.

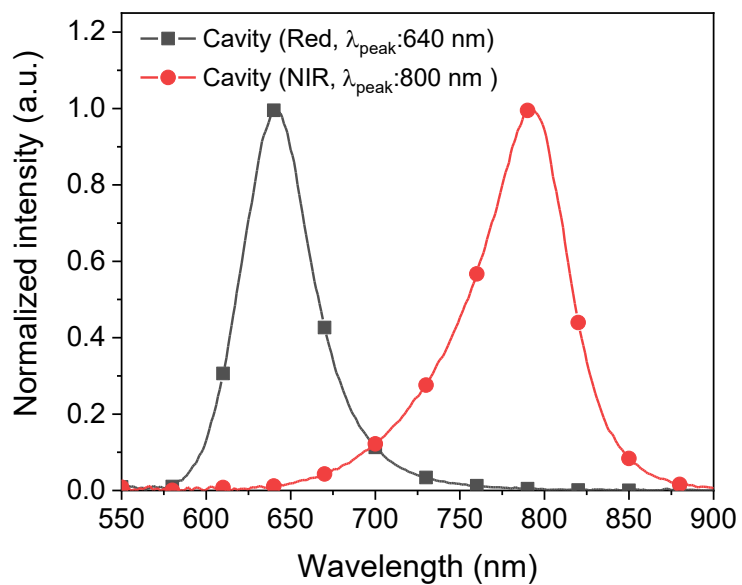


Supplementary Fig. 12| EL spectra of cavity OLEDs used for the transmission test. The red OLED is based on Ir(piq)₃, while the cavity NIR OLED uses the same emitter as in the main device and was spectrally tuned via the microcavity effect.

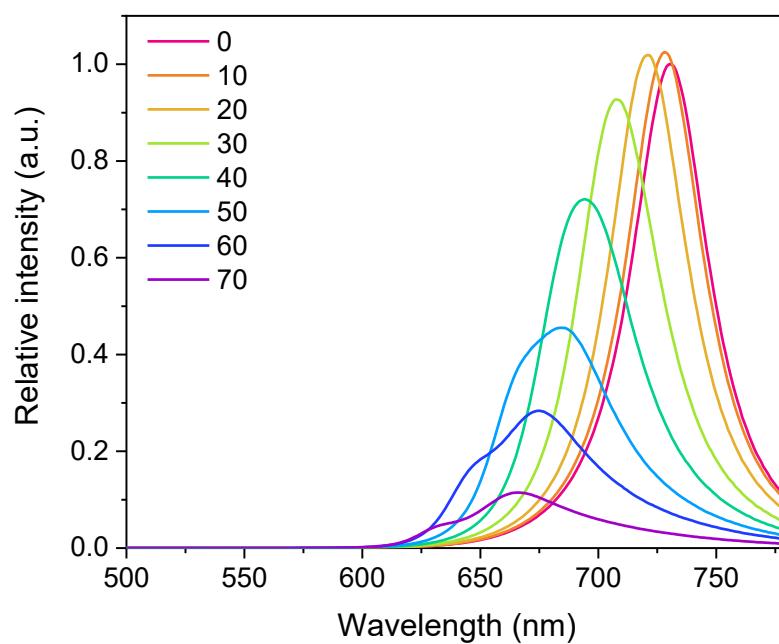


Supplementary Fig. 13 | Emission spectra of cavity NIR OLEDs as a function of viewing angle.

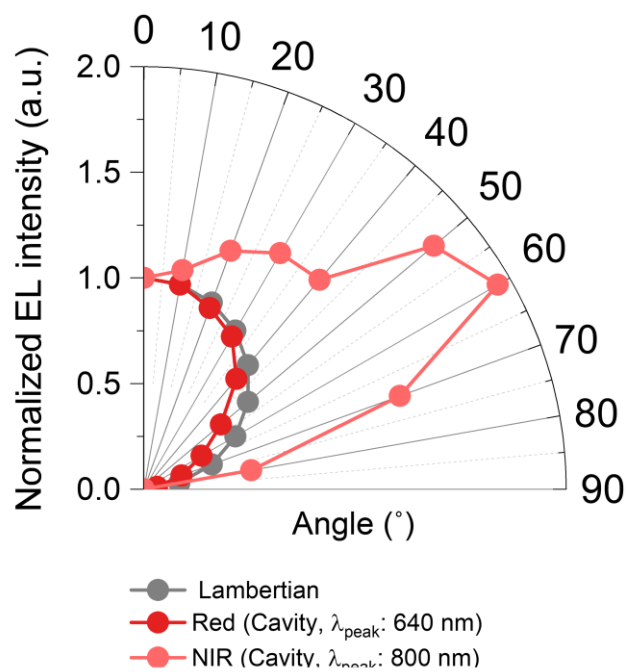


Supplementary Fig. 14| Angular profile of cavity OLEDs. The red OLED exhibited a sub-Lambertian profile, while the cavity NIR OLED showed a super-Lambertian emission.

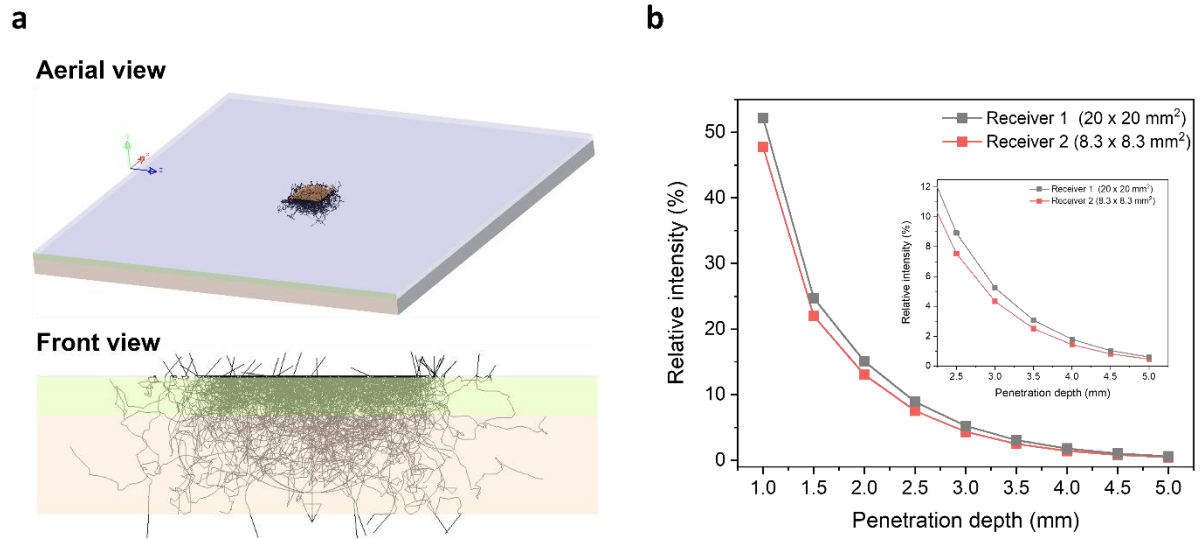

Supplementary Fig. 15| Monte Carlo simulation of photon transport and depth-dependent power density distribution. a, Monte Carlo simulation setup. OLED ($8.3 \times 8.3 \text{ mm}^2$) was placed on the skin surface. **b,** Depth-dependent relative intensity. Grey indicates the maximum power density within the receiver plane, and red indicates the area-averaged power density.

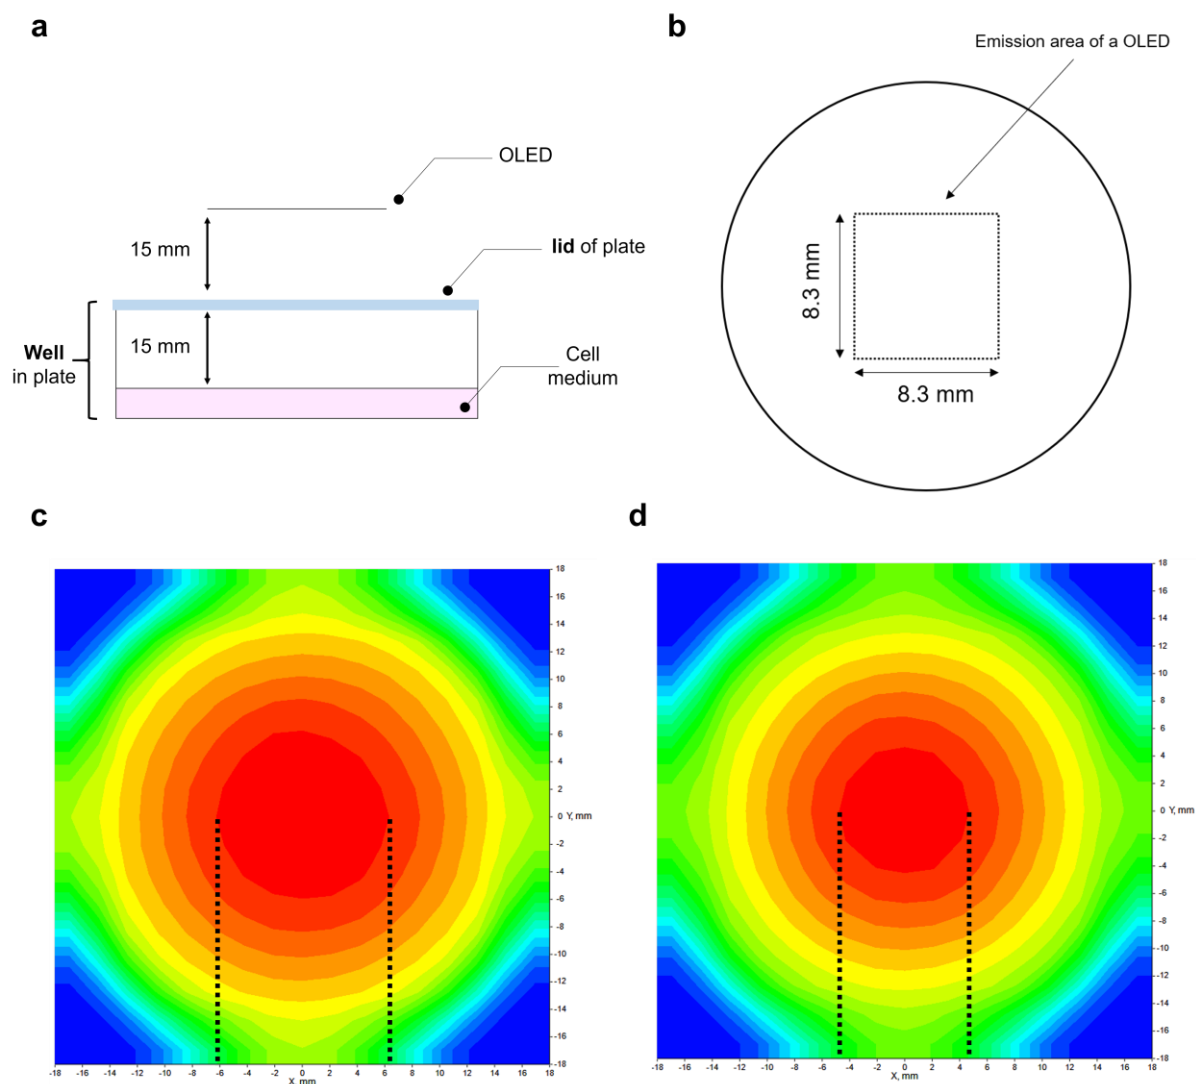


Supplementary Fig. 16| *In vitro* experimental setup and simulated irradiance profiles. **a**, Cross sectional view illustrating orthogonal alignment between the OLED and the receiving plane within the cell medium and the defined analysis window. **b**, Top view of the measurement configuration showing the OLED beneath the culture well and the analysis area centered above the emitting surface. **c**, Contour map of the simulated irradiance distribution in the cell culture medium produced by the non-cavity NIR OLED, normalized to the maximum within the plane of analysis. **d**, Corresponding contour map for the cavity NIR OLED, showing a narrower irradiation region.

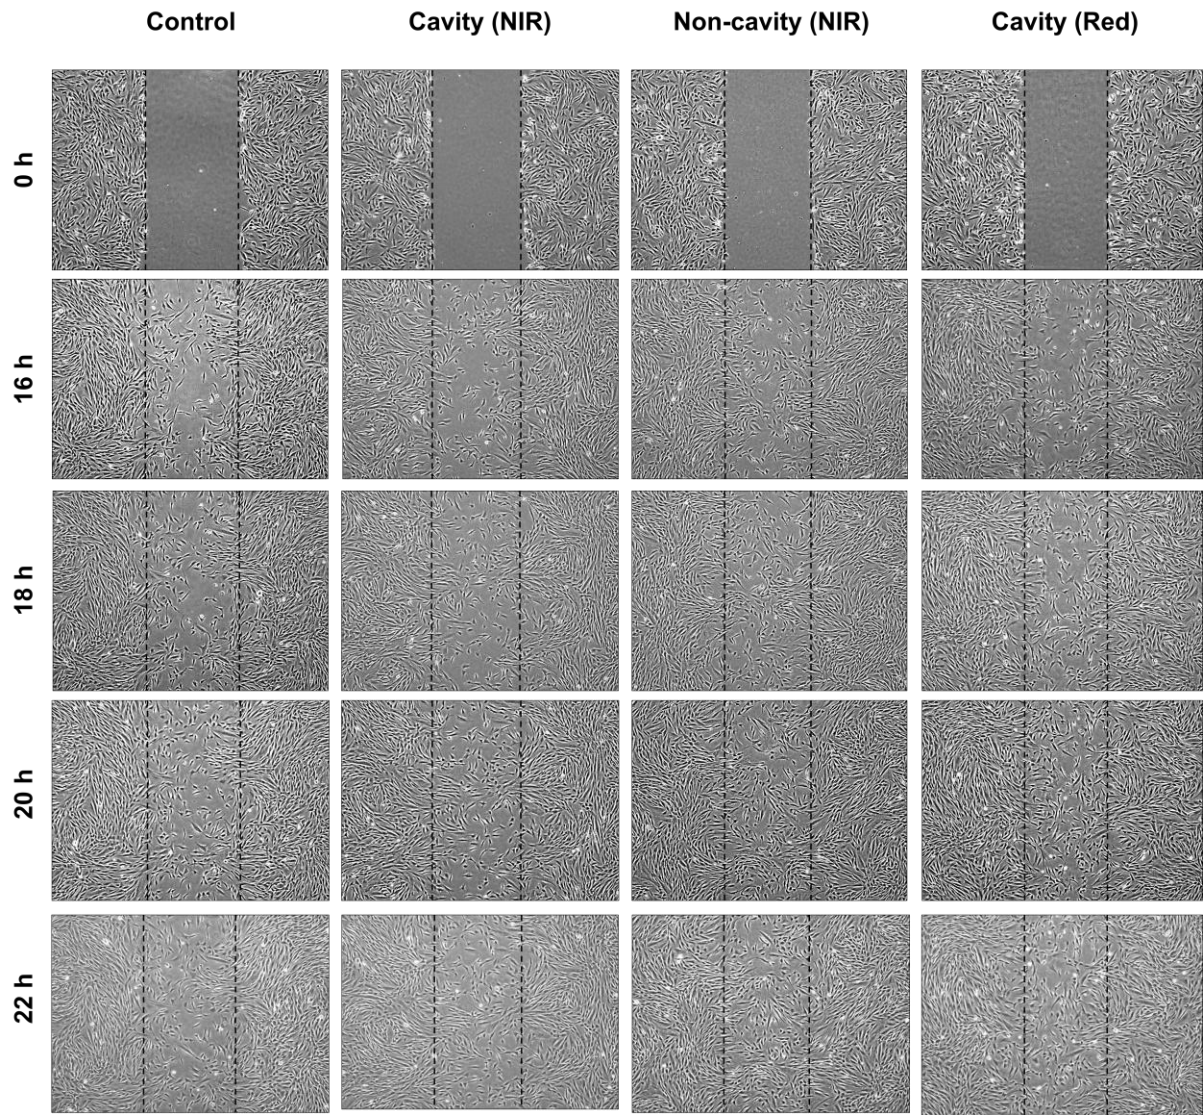


Supplementary Fig. 17| Time-lapse optical microscopy of scratch-wound closure across treatment groups. The dotted line marks the initial wound boundary. Images were acquired every 2 h from 16 to 22 h after irradiation, and all groups were imaged at identical time points.


a

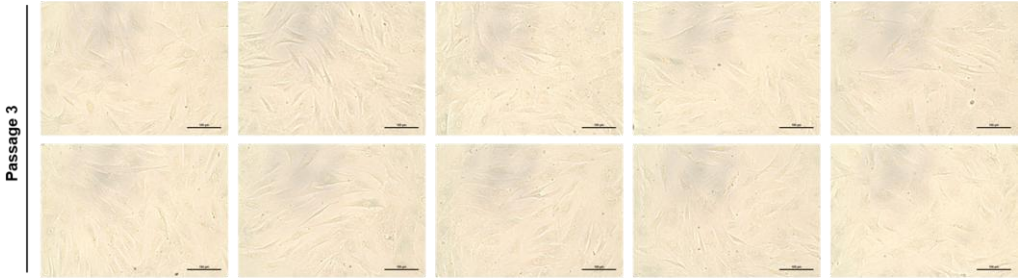


b

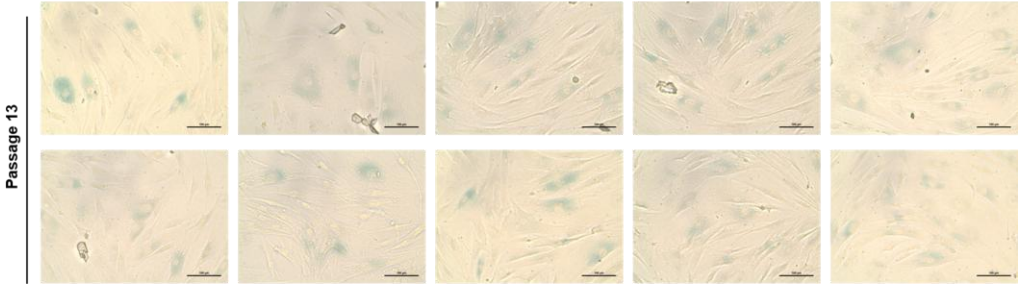


c

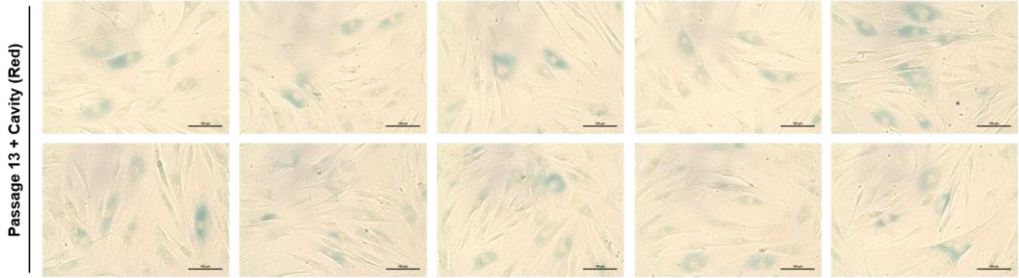

d

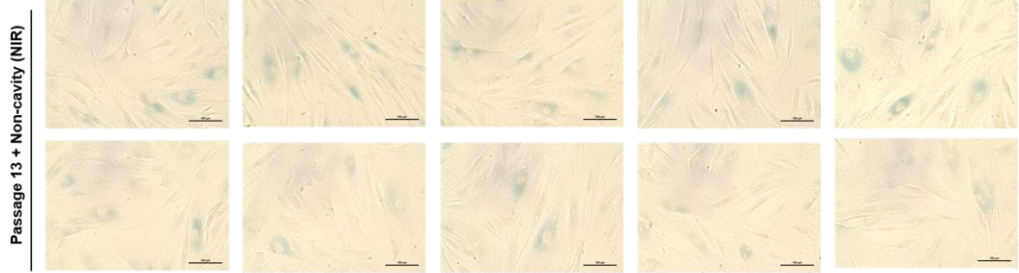

e

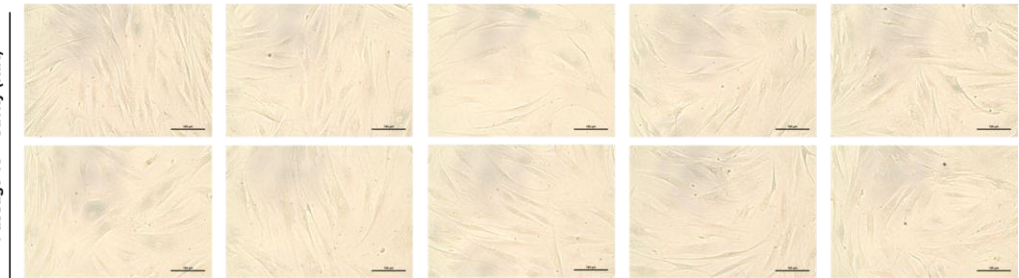

Supplementary Fig. 18| SA- β -gal staining images of hDPCs are presented across passages and treatment conditions. Blue staining indicates senescent cells. **a**, passage-3 control. **b**, passage-13 control. **c**, passage-13, cavity red OLED irradiation group. **d**, passage-13, non-cavity NIR OLED irradiation group. **e**, passage-13, cavity-tuned NIR OLED irradiation group.