

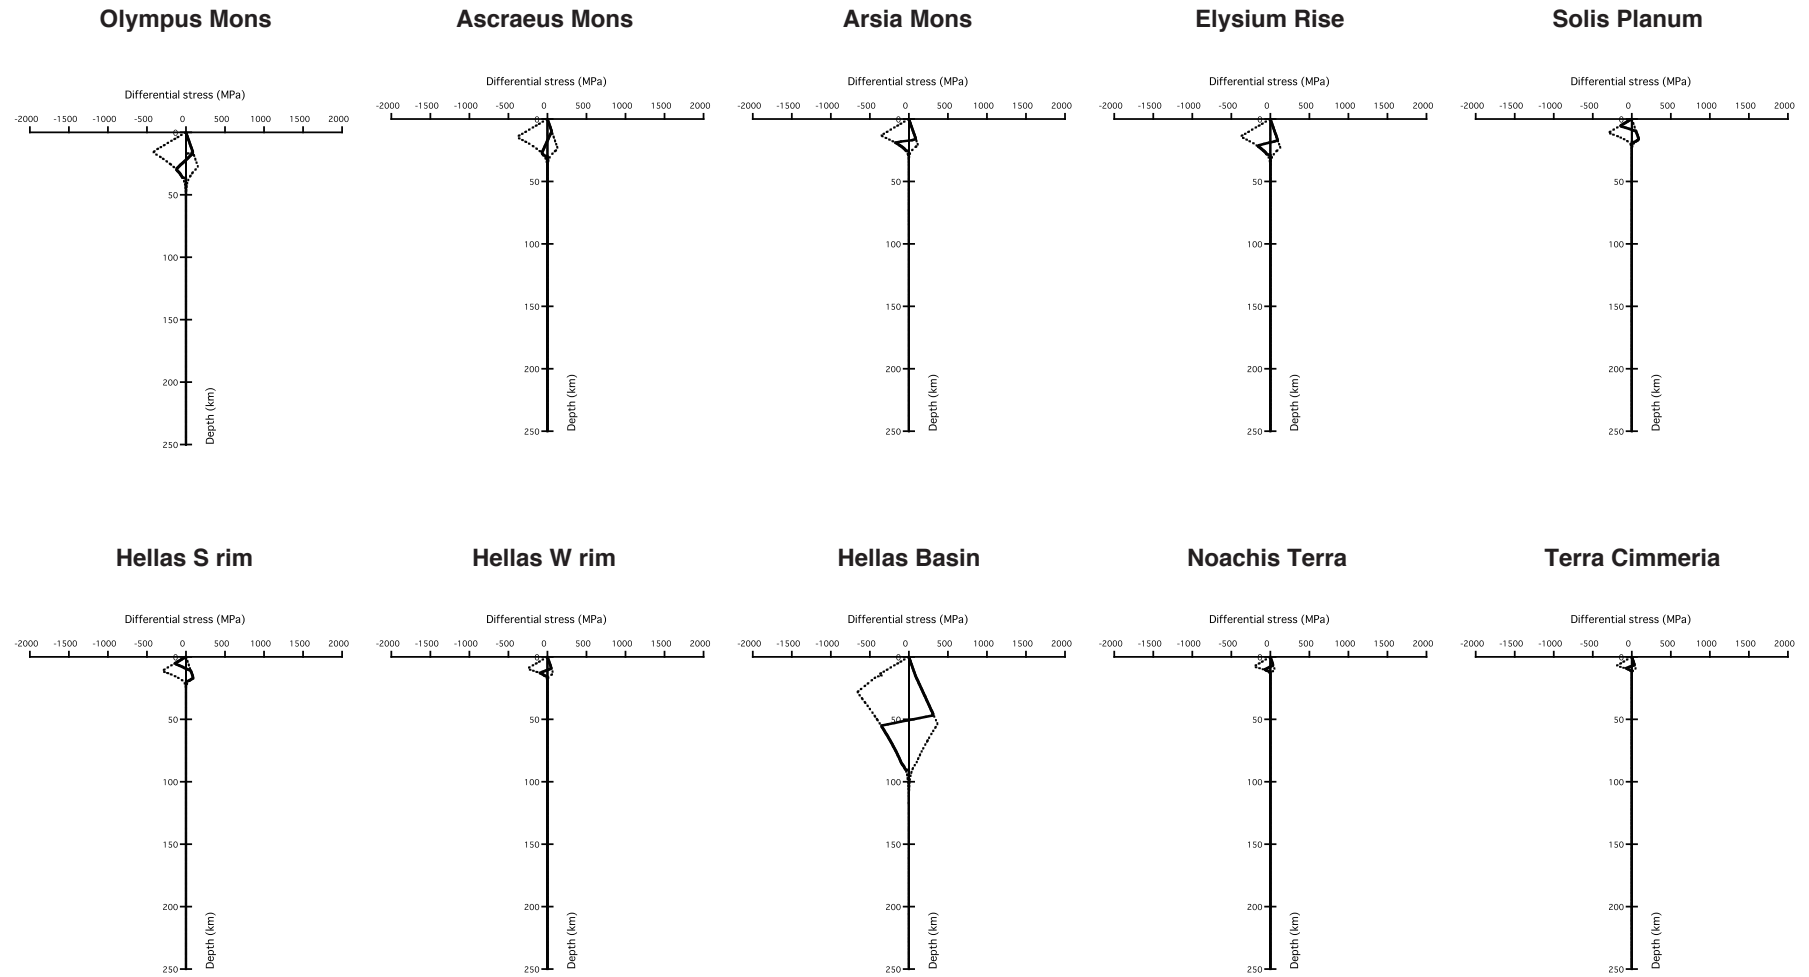


Figure S2. Rheological structures at additional locations calculated under wet conditions. Plastic strength was calculated using a strain-rate of 10^{-19} s^{-1} .